


PANNELLI – NEON FLEX - PLAFONIERE LED



PANNELLI LED

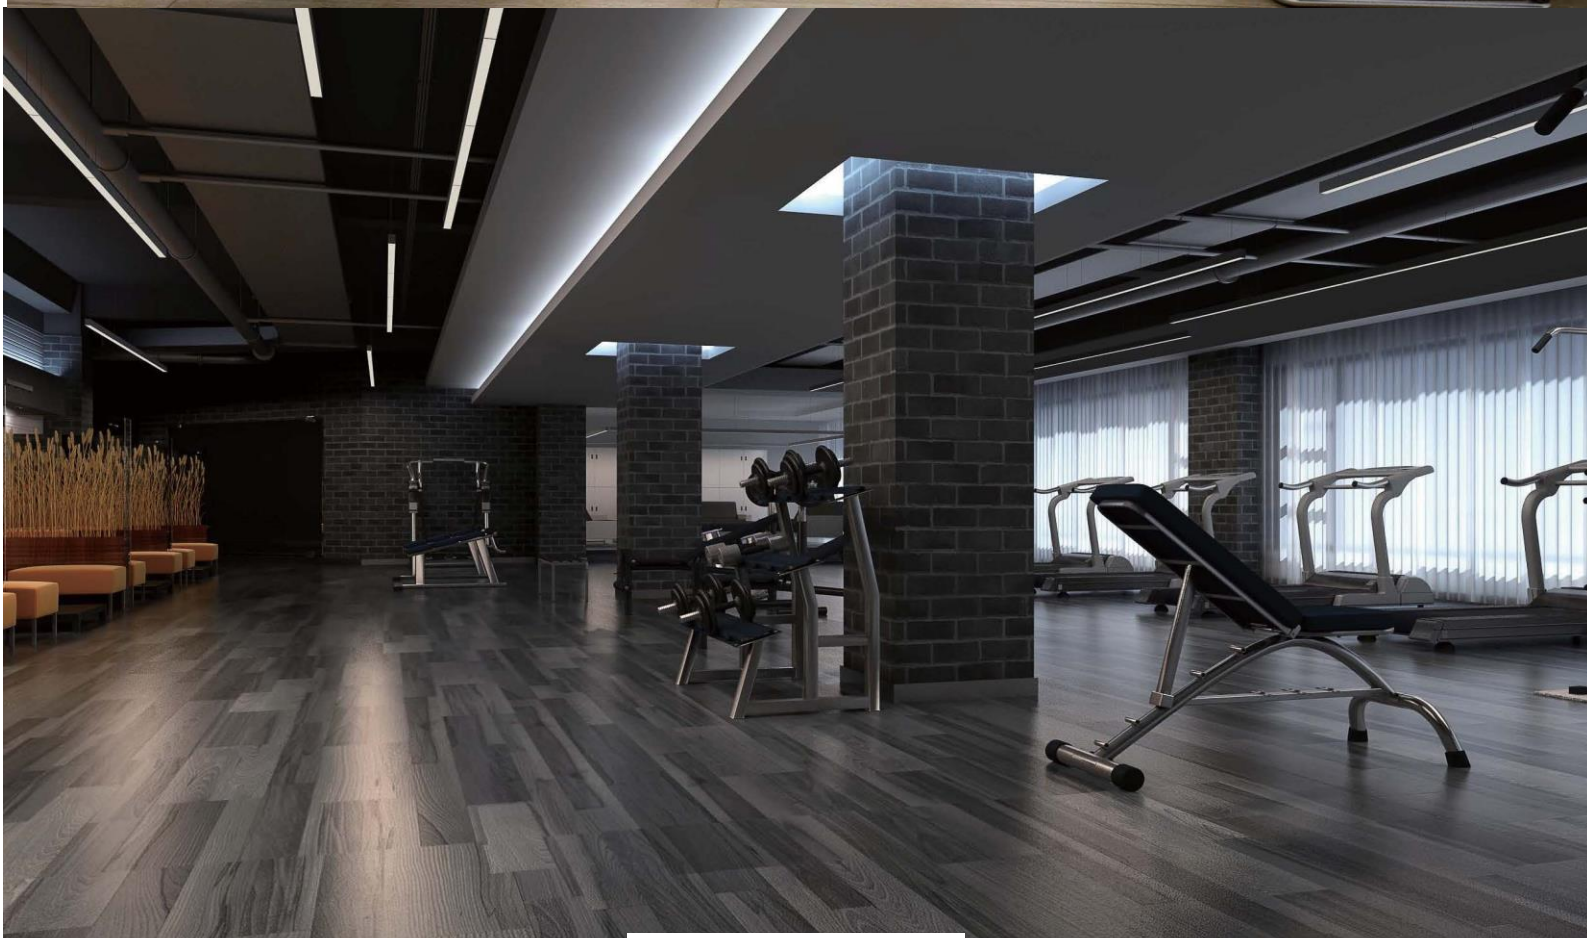


BP01 220V 30 W / 40W

Pannello led ultra piatto, assenza di strobo flash. Bordo in alluminio Alimentatore incluso

Super slim Led panel, absence of strobo flash. Aluminum edge. Led driver included.

CODE	Finish	POWER W	lm	IP	COLOR	H mm	L x P mm	TC °k
BP01AC	WHITE	30	3000	40	WARM	9	596x596	3000
BP01UN	WHITE	35	3500	40	NATUR	9	596x596	4000
BP01AN	WHITE	36	3100	40	NATUR	9	596x596	4000
BP01AF	WHITE	35	3500	40	COLD	9	596x596	6000
BP01BN	WHITE	40	4000	40	NATUR	9	596x596	4000
BP01BF	WHITE	40	4000	40	COLD	9	596x596	6000




BP02 220V 40W

Pannello led ultra piatto, assenza di strobo flash. Bordo in alluminio Alimentatore incluso

Super slim Led panel, absence of strobo flash. Aluminum edge. Led driver included.

CODE	Finish	POWER W	lm	IP	COLOR	H mm	L x P mm	TC °k
BP02N	WHITE	40	4000	20	NATUR	9	1195x295	4000
BP02C	WHITE	40	4000	20	WARM	9	1195x295	3000
BP02F	WHITE	40	4000	20	COLD	9	1195x295	6000

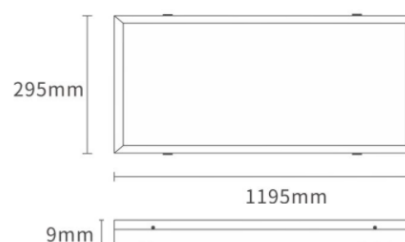

PANNELLI LED



BP01KB 220V 38W


Nuova generazione di pannelli led, i moduli LED si trovano sulla parete del pannello posteriore e illuminano direttamente verso il basso.

Si tratta di pannelli retroilluminati dotati di lenti che estendono l'angolo di emissione della luce, garantendo l'uniformità dell'illuminazione.

L'eliminazione della piastra conduttrice di luce riduce notevolmente la possibilità di ingiallimento dell'apparecchio e consente migliori parametri di illuminazione.

NEW

D

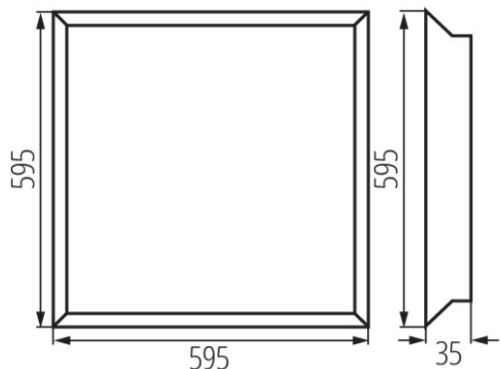

New generation of led panels, the LED modules are located on the rear panel wall and light directly downwards.

These are backlit panels equipped with lenses that extend the angle of light emission, ensuring uniformity of lighting. The elimination of the light conducting plate considerably reduces the possibility of yellowing of the luminaire and allows better lighting parameters.

CODE	Finish	POWER W	lm	IP	COLOR	H mm	L x P mm	TC °k
BP01KB	WHITE	38	3800	20	NATUR	35	595x595	4000



PANNELLI LED BASSO UGR

UGR 16



BP6060 220V 32W

Pannello Led con ottica modulare UGR16
Bianco Neutro 32W 60X60cm indicato per
uffici ed enti pubblici

*Led panel with UGR 16 Neutral White 32W
60X60cm modular optic indicated for offices
and public bodies*


CODE	Finish	POWER W	lm	IP	ANGLE °	H mm	L x P mm	TC °k
BP6060	WHITE	32	4500	40	80	13	595x595	4500



BP4072 220V 40W

Cornice luminosa 40W Bianco Neutro 60X60cm
indicato per uffici e sale riunioni.

*Bright frame 40W Neutral White 60X60cm
suitable for offices and meeting rooms*



CODE	Finish	POWER W	lm	IP	ANGLE °	H mm	L x P mm	TC °k
BP4072C	WHITE	40	3600	40	120	14	591x591	3000
BP4072N	WHITE	40	3600	40	120	14	591x591	4000



NEON FLEX LED



D




RoHS



BTLFBN 24V 150W

10 mt di tubo LED Flessibile con 120 LED/mt a luce continua copertura in PVC grado di protezione IP67 tagliabile ogni 5 cm

10 meters of flexible LED tube with 120 LED / mt continuous light PVC covering IP67 protection level, cut every 5 cm



CODE	V dc	POWER W/m	N° LED	IP	COLOR	LED	lm	TC °k	P X H mm
BTLFBNC2	24	15	1200	67	WARM	3528	14000	2700	10 x 10
BTLFBNC	24	15	1200	67	COLD	3528	14500	3000	10 x 10
BTLFBNN	24	15	1200	67	NATUR	3528	15000	4000	10 x 10



D




RoHS



BTLFBRGB 24V 78W

5 mt di tubo LED Flessibile RGB con 120 LED/mt a luce continua copertura in PVC grado di protezione IP67 tagliabile ogni 5 cm

5 meters of flexible LED RGB tube with 120 LED / mt continuous light PVC covering IP67 protection level, cut every 5 cm



CODE	V dc	POWER W/m	N° LED	IP	COLOR	LED	lm	TC °k	P X H mm
BTLFBRGB	24	15	600	67	RGB	3535	2000	RGB	10 x 10



NEON FLEX LED



D



RoHS



BTLFL 24V 90W

5 mt di tubo LED Flessibile con 120 LED/mt a luce continua copertura in PVC grado di protezione IP67 tagliabile ogni 5 cm

5 meters of flexible LED tube with 120 LED / mt continuous light PVC covering IP67 protection level, cut every 5 cm



CODE	V dc	POWER W/m	N° LED	IP	COLOR	LED	Lm	TC °k	P X H mm
BTLFLC2	24	18	600	67	WARM	3528	4000	2700	12 x 6
BTLFLC	24	18	600	67	WARM	3528	4100	3000	12 x 6
BTLFLN	24	18	600	67	COLD	3528	4200	4000	12 x 6



D




RoHS



BTLFF 24V 90W

5 mt di tubo LED Flessibile con 120 LED/mt a luce continua copertura in PVC grado di protezione IP67 tagliabile ogni 5 cm

5 meters of flexible LED tube with 120 LED / mt continuous light PVC covering IP67 protection level, cut every 5 cm



CODE	V dc	POWER W/m	N° LED	IP	COLOR	LED	Lm	TC °k	P X H mm
BTLFFC2	24	18	600	67	WARM	3528	4000	2700	16 x 8
BTLFFC	24	18	600	67	WARM	3528	4100	3000	16 x 8
BTLFFN	24	18	600	67	COLD	3528	4200	4000	16 x 8



D




RoHS



BTLFN4 24V 40W


5 mt di tubo LED Flessibile con 180 LED/mt a luce continua copertura in PVC grado di protezione IP65 tagliabile ogni 5 cm

5 meters of flexible LED tube with 180 LED / mt continuous light PVC covering IP65 protection level, cut every 5 cm



CODE	V dc	POWER W/m	N° LED	IP	COLOR	LED	Lm	TC °k	P X H mm
BTLFN4C2	24	8	600	65	WARM	3528	2000	2700	10 x 4
BTLFN4C	24	8	600	65	WARM	3528	2100	3000	10 x 4
BTLFN4N	24	8	600	65	COLD	3528	2200	4000	10 x 4

NEON FLEX



BTLFR1 24V 90W

5 mt di tubo LED Flessibile con 120 LED/mt a luce continua a 360° copertura in PVC grado di protezione IP65 tagliabile ogni cm.

5 meters of flexible LED tube with 120 LED / mt continuous 360° light PVC covering IP65 protection level, cut every cm.

CODE	V dc	POWER W/m	N° LED	IP	COLOR	LED	Lm	TC °k	P X H mm
BTLFR1C	24	12	600	65	WARM	3528	6300	3000	18 x 18
BTLFR1N	24	12	600	65	NATUR	3528	6500	4000	18 x 18



BTLFL1 24V 100W

10 mt di tubo LED Flessibile con 120 LED/mt a luce continua copertura in PVC grado di protezione IP65 tagliabile ogni mm

10 meters of flexible LED tube with 120 LED / mt continuous light PVC covering IP65 protection level, cut every mm

CODE	V dc	POWER W/m	N° LED	IP	COLOR	LED	Lm	TC °k	P X H mm
BTLFL1C2	24	10	1200	65	WARM	3528	4000	2700	12 x 6
BTLFL1N	24	10	1200	65	NATUR	3528	4100	4000	12 x 6
BTLFL1F	24	10	1200	65	COLD	3528	4200	6000	12 x 6
BTLFL1R	24	10	1200	65	RED	3528	4000	2200	12 x 6
BTLFL1B	24	10	1200	65	BLUE	3528	4100	-	12 x 6
BTLFL1A	24	10	1200	65	ORANGE	3528	4200	-	12 x 6
BTLFL1P	24	10	1200	65	PINK	3528	4200	-	12 x 6



BTLFL54 12V 30W

5 mt di tubo LED Flessibile luce continua copertura in PVC grado di protezione IP65 tagliabile ogni cm

5 meters of flexible LED tube continuous light PVC covering IP65 protection level, cut every cm

CODE	V Dc	POWER W/m	N° LED	IP	COLOR	LED	Lm	TC °k	P X H mm
BTLFL54C	12	7	1200	65	WARM	3528	2000	3000	13 x 6
BTLFL54N	12	7	1200	65	NATUR	3528	2100	4000	13 x 6
BTLF54F	12	7	1200	65	COLD	3528	2200	6000	13 x 6



BARACOS

PLAFONIERE LED



E



BSLFI 220V 24W 32W

Plafoniera LED esterno compatta adatta per essere collegata in file continue

Outdoor cabinet very compact recommended for in line installation

CODE	Color	POWER W	lm	IP	COLOR	H mm	L x P mm	TC °k
BSLFI12	Gray	24	4000	65	NATUR	58	1200x65	4000
BSLFI15	Gray	32	5200	65	NATUR	58	1500x65	4000

ALTA
LUMINOSITA'



E




BERG 220V 50W 70W

Plafoniera LED esterno compatta, semplice e affidabile

Outdoor cabinet very compact, simply and reliable

CODE	Color	POWER W	lm	IP	COLOR	H mm	L x P mm	TC °k
BERG50	Gray	50	7000	65	NATUR	77	1190x75	4000
BERG70	Gray	70	9800	65	NATUR	77	1570x75	4000



BKALUW



E



BKALU 220V 10W

Plafoniera LED esterno compatta

Outdoor cabinet very compact

CODE	Color	POWER W	lm	IP	COLOR	H mm	L x P mm	TC °k
BKALUW	Gray	10	700	65	NATUR	66	118x212	4000
BKALUK	Gray	10	700	65	NATUR	72	188x188	4000



BARACOS