

STRISCE LED RIGIDE



RETRO ILLUMINAZIONE PER LIGHT BOX



LED
OSRAM



BR3612 12V 1W

Modulo a 1 led OSRAM da 1W 150LM 12V
disponibile in 3 tonalità di luce

3SMD2835 7215 1W 150Lm 12V 1 led module
available in 3 light shades

CODE	V dc	POWER W	N° LED	IP	COLOR	L mm	lm	TC °k	P x H mm
BR3612C	12	1	1	65	WARM	36	150	3000	12 x 8
BR3612N	12	1	1	65	NATUR	36	160	4000	12 x 8
BR3612F	12	1	1	65	COLD	36	170	6000	12 x 8




BR688 12V 1W

Modulo a 3 led 3SMD2835 7215 da 1W
150LM/W 170D 12V disponibile in 3 tonalità di
luce

3SMD2835 7215 1W 150LM/W 170D 12V 3 led
module available in 3 light shades

CODE	V dc	POWER W	N° LED	IP	COLOR	L mm	lm	TC °k	P x H mm
BR688C	12	1	3	68	WARM	72	145	3000	15 x 8
BR688N	12	1	3	68	NATUR	72	150	4000	15 x 8
BR688F	12	1	3	68	COLD	72	160	6000	15 x 8

MATRICE
LED

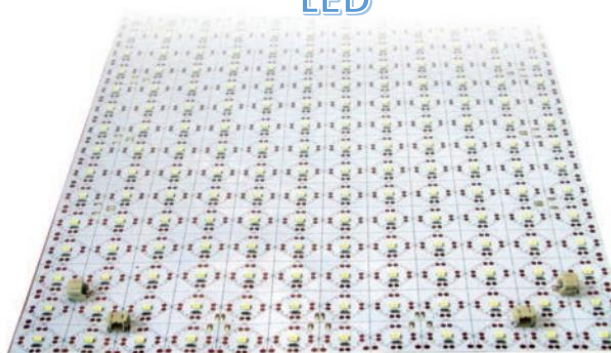


BR1780 24V 10W

Matrice LED 480X240MM 288LED 10W IP20
4000K utilizzabile come retro illuminazione,
uniformità nella luce possibilità di collegamento
in parallelo, con foglio autodissipante in rame.

LED matrix 480X240MM 288LED 10W IP20 4000K
usable as backlighting, light uniformity, possibility of
parallel connection, with self-dissipating copper
sheet.

CODE	V Dc	POWER W	N° LED	IP	COLOR	L mm	lm	TC °k	P x H mm
BR1780C	24	10	288	20	WARM	480	1200	3000	290 x 1
BR1780N	24	10	288	20	NATUR	480	1300	4000	290 x 1
BR1780F	24	10	288	20	COLD	480	11400	6000	290 x 1

RETRO ILLUMINAZIONE PER LIGHT BOX



NEW

E




RoHS



BRS3237 24V 4W

Modulo star led con LED Nichia 219C
Dimensioni del PCB : 20x21,2mm 350 lm 207
lm/W 250V
Life time >60000h @ 500mA

LED star module with Nichia 219C LED
PCB size: 20 x 21.2mm 350lm 207lm / W 250V
Life time > 60000h @ 500mA

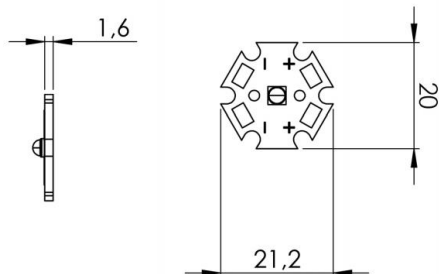

CODE	V	POWER W	N° LED	IP	COLOR	L mm	lm	TC °k	P x H mm
BRS3237C	2,6	0,92	1	20	WARM	20	170	3000	20 x 2
BRS3237N	2,6	0,92	1	20	NATUR	20	170	4000	20 x 2
BRS3237F	2,6	0,92	1	20	COLD	20	200	5000	20 x 2



E




RoHS



BM1552 24V 3W

Modulo led composto da un led EPISTAR 2,8W
per insegne e lightbox

LED module composed of an EPISTAR 2.8W LED
for signs and lightboxes

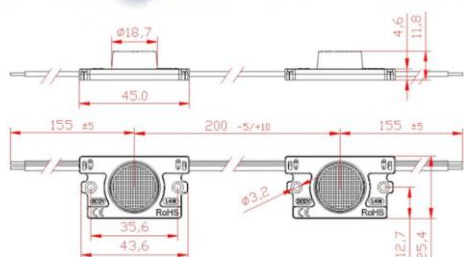

CODE	V dc	POWER W	N° LED	IP	COLOR	L mm	lm	TC °k	P x H mm
BM1552	24	3	1	65	COLD	45	200	6000	12 x 25



BACKLIGHT

G




RoHS



BRS6 24V 155W

Back light con 22 led e lente da 160° per retro
illuminazione di scritte pubblicitarie e pannelli.
Kit composto da 10 barre LED da 110 cm
cablate con doppio cavo

Back light with 22 led and 160° lens specific for
advertising boxes and panels. Kit made of 10
LED bars 110 cm equipped with double cable

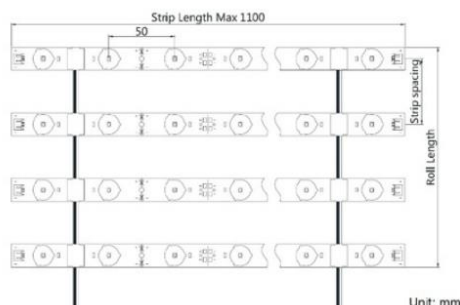

Unit: mm

CODE	V dc	POWER W/mt	Angle	IP	COLOR	L mm	lm	TC °k	P x H mm
BRS6N	24	15	160	20	NATUR	1100	190	4000	18 x 7
BRS6F	24	15	160	20	COULD	1100	190	6000	18 x 7



BARACOS